

## Quick Start



AT&T Mobile Hotspot MiFi® Liberate

# Getting to Know Your Mobile Hotspot

With the AT&T Mobile Hotspot MiFi® Liberate, you can connect up to 10 Wi-Fi enabled devices, such as laptops, tablets, and eReaders.



\* microSD card sold separately.




# Device Setup and Power On

MiFi Liberate comes with the SIM card and battery already installed. Remove the battery pull-tab prior to use.

## Power On and Screen Lock

- Press and release the power button. When the touchscreen displays the interactive icons, your device is ready to use.
- To lock the touchscreen, press and release the power button. To unlock, press and release the power button and slide the lock tab.
- To power off the device, press and hold the power button for 3 seconds to display the Shut Down window, then tap **Yes**.

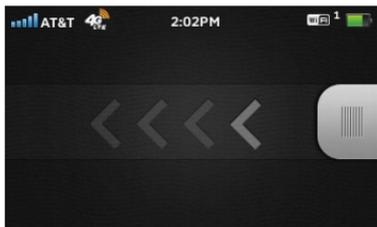

## Sound Alerts


To customize your Sound Alerts, Tap **Settings** > **Sound Alerts**. Slide the ON/OFF button to enable or disable a specific sound alert.



# Connect Additional Devices

You can connect up to 10 Wi-Fi enabled devices. To connect wireless devices (cameras, media players, smartphones, etc.):

- ① Open the Wi-Fi menu on the device you would like to connect and view the list of available networks.
- ② Select your MiFi Liberate Wi-Fi Network Name (SSID) (e.g., MIFI-LIBERATE-XXXX).
- ③ Select Connect and enter the Wi-Fi password displayed under Connection Details .

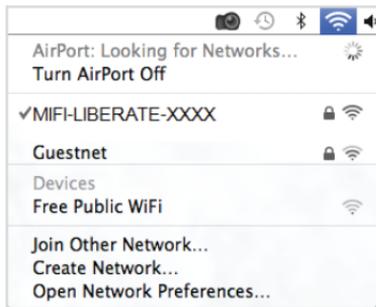

## Connecting via USB Cable

When you connect to a laptop using a USB cable, you'll be able to connect to the Internet immediately.

To change the USB connection setting to Charge Only (no data use), select **Settings**  > **USB Mode** > **Charge Only** on the MiFi Liberate touchscreen.



# MiFi Liberate Manager

MiFi Liberate Manager is a Web interface you can log into to customize settings, change your password, get information and access applications.

- On any connected device browse to **http://att.mifiberate** to access features and settings.
- **Default Admin Login** is attadmin. Select **Settings > Device Settings > Admin Login** to view the Admin Login.

The screenshot shows the MiFi Liberate Manager web interface. The interface is divided into several sections:

- Status bar:** Located at the top right, showing the AT&T logo and a 'Login' button.
- Message bar:** Below the status bar, displaying a notification: "Connected devices: A device has connected to the MiFi Liberate. View Connected Devices."
- Navigation panel:** A vertical sidebar on the left containing icons and labels for: MiFi Home, Data Usage, Connected Devices (5/5), Settings, Messages (10), File Sharing, Media Center, GPS, and About.
- Quick Links menu:** A section below the navigation panel with links for: Customize MiFiLib Settings, Change MiFi Liberate Manager Login, and Install Advanced Services.
- AT&T Mobile Hotspot MiFi® Liberate:** The main header area with a title and a "Quick Links" section.
- Feature Cards:** Three cards are displayed: "Share Files" (with a "Learn More" button), "Play Media" (with a "Learn More" button), and "Locate with GPS" (with a "Learn More" button).
- Access File Sharing:** A label pointing to the "Share Files" card.
- Access Media Center:** A label pointing to the "Play Media" card.
- Connect to GPS location information:** A label pointing to the "Locate with GPS" card.


The interface also features the AT&T logo at the bottom left and the "MiFi" logo at the bottom right.

# Check Your Data Usage

You can check your data usage directly on the MiFi Liberate touchscreen display, or from the MiFi Liberate Manager page.


## On the Mobile Hotspot Display

- Tap the **Data Usage** icon  on the touchscreen. You can view your data plan summary, data used, days remaining in your billing cycle, and more.

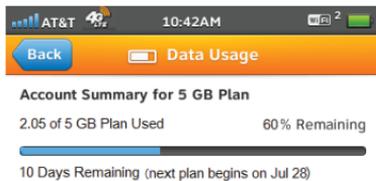

## On the MiFi Liberate Manager

- Tap the **Data Usage** tab  on the MiFi Liberate Manager Navigation panel at <http://att.mifiliberate>. Enter your Admin Login (default is attadmin) to view your Data Usage details.

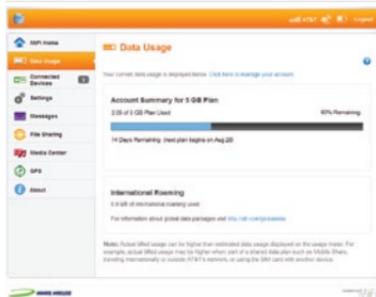

Note: Actual billed usage can be higher than estimated data usage displayed on the usage meter. For example, actual billed usage may be higher when: part of a shared data plan such as Mobile Share, traveling internationally or outside AT&T's network, or using the SIM card with another device.

## Network Indicators

Your 4G LTE wireless device will indicate which AT&T wireless network your device is connected. A network indicator does not necessarily mean that you will experience any particular upload or download data speeds.

**4G**  
LTE Connected to the AT&T 4G LTE network.

**4G** Connected to the AT&T HSPA+ network. The AT&T HSPA+ network is capable of delivering 4G speeds when combined with enhanced backhaul. Your wireless device cannot distinguish between HSPA+ cell sites with enhanced backhaul and those without. Enhanced backhaul is not available everywhere. 4G availability is increasing with ongoing backhaul deployment. Learn more at [att.com/network](http://att.com/network).

**E** Connected to the AT&T EDGE/2G network.

Actual data upload and download speeds depend on various factors, including the device, network utilization, file characteristics, terrain, etc. Learn more at: <http://www.wireless.att.com/learn/articles-resources/wireless-terms.jsp>, your AT&T Wireless Customer Agreement, Section 3.2 Where and How Does AT&T Service Work?

Mobile broadband is not available in all areas. Limited 4G LTE availability in select markets. LTE is a trademark of ETSI. Learn more at [att.com/network](http://att.com/network).

# Sharing Movies, Music, and Photos

Access and play your movies, music and photos stored on the microSD on connected devices using a Web browser. You can also access the media from your DLNA® capable TV or player. Devices must be connected to MiFi Liberate to view media files.

## On Your MiFi Liberate

- ① Tap the **Media Center** icon  on the touchscreen.
- ② Slide the Enable Media Center button to **ON** .



## On Your Connected Device

- ① From your connected computer or mobile device with browser capabilities: Browse to **<http://att.mifiberate/media>** to start streaming.
- ② From a DLNA compatible device: Use the DLNA interface on the connected device to select **MiFi-Liberate**.



# Sharing Files

The MiFi Liberate comes with a microSD™ card slot that enables you to store files and share them with connected devices.

## On Your MiFi Liberate

Insert a microSD card. File sharing is not enabled by default. If file sharing is enabled, devices connected to your MiFi Liberate can access the files on your microSD card.

- ① Pull out the microSD door on the back of the device and insert the card.
- ② Tap the **File Sharing** icon  on the touchscreen.
- ③ Slide the file sharing button to on.



## On Your Connected Device

The files on the microSD card will appear as a network drive or shared folder on your computer. Other connected devices can view the files using a Web browser at <http://att.mifiliberate/files>.

- ① On the Mac: The microSD card will appear under the shared menu in the finder.
- ② On the PC: The microSD card will appear in the Networks section of the My Computer window or file browser.



# Connect to Your MiFi Liberate

## On Your MiFi Liberate

- 1 Press and release the power button to turn the device ON.
- 2 Tap the **Connection Details** icon  to display your device's Wi-Fi Network Name (SSID) and password.



## On Your Computer

- 3 Use your Wi-Fi manager to locate the MiFi Liberate Wi-Fi Network Name (SSID) and select it.
  - Windows: Click **Connect**.
  - Mac OS X: Click the MiFi device network name.
- 4 When prompted, enter the Wi-Fi password found under **Connection Details**.



## Change Your Wi-Fi Network Name and Password

After connecting on your computer, browse to the MiFi Liberate Manager (<http://att.mifiliberate>), and go to **Settings > Hotspot Settings > General**. You may need to reconnect to MiFi Liberate after saving changes.

## Reset Device

To restore MiFi Liberate to the factory default settings, push and hold the RESET button on the back of the device for 5 seconds.

# Touchscreen Icons

Swipe the screen to see more icons.



**Connection Details** displays the Wi-Fi Network Name and the Wi-Fi Password for your device.



**Data Usage** enables you to check your data plan summary, data used, remaining days in your billing cycle, and more.



**Connected Devices** displays details on devices currently connected to or blocked from your MiFi Liberate.



**Settings** allows you to access and configure your MiFi Liberate device settings.



**Messages** connects you to text messages delivered to your MiFi Liberate, including AT&T service notifications.



**File Sharing** upload and download files stored on your microSD card from compatible connected devices.



**Media Center** provides access to movies, music and photos stored on your microSD card from connected devices.



**GPS** allows you to share location information with connected devices.



**Wi-Fi Protected Setup** allows you to connect WPS-enabled devices to MiFi Liberate without using a keyboard.



**About** provides access to current status and device information, help, software updates and customer care. Tap **Customer Care** to view your wireless number.

Tap  to see helpful information.

Tap **Back** to return to the MiFi Liberate touchscreen menu.

# For More Information

## *On the Web*

- Interactive Web tutorials are available at **att.com/Tutorials**. Select Manufacturer: **Novatel Wireless** and Model: **MiFi Liberate** from the drop down menus.
- Detailed support information including device specifications, troubleshooting, and user forums are available at **att.com/DeviceSupport**.

## *On the Phone*

- Call AT&T Customer Care at **1-800-331-0500** for assistance with your AT&T service. To find your wireless number, tap **About > Help and Customer Care > Your Wireless Number**.

Novatel Wireless and the Novatel Wireless logo are trademarks of Novatel Wireless, Inc. MiFi and the MiFi logo are registered trademarks of Novatel Wireless, Inc. DLNA is a trademark of the Digital Living Network Alliance. microSD is a trademark of SanDisk. All other marks contained herein are the property of their respective owners. ©2012 AT&T Intellectual Property. All rights reserved. AT&T, the AT&T logo and all other AT&T marks contained herein are trademarks of AT&T Intellectual Property and/or AT&T affiliated companies.